


Hybrid Inverter

SUN- 3 / 3.6 / 5 / 6 K-SG03LP1-AU



Colorful touch LCD, IP65 protection degree

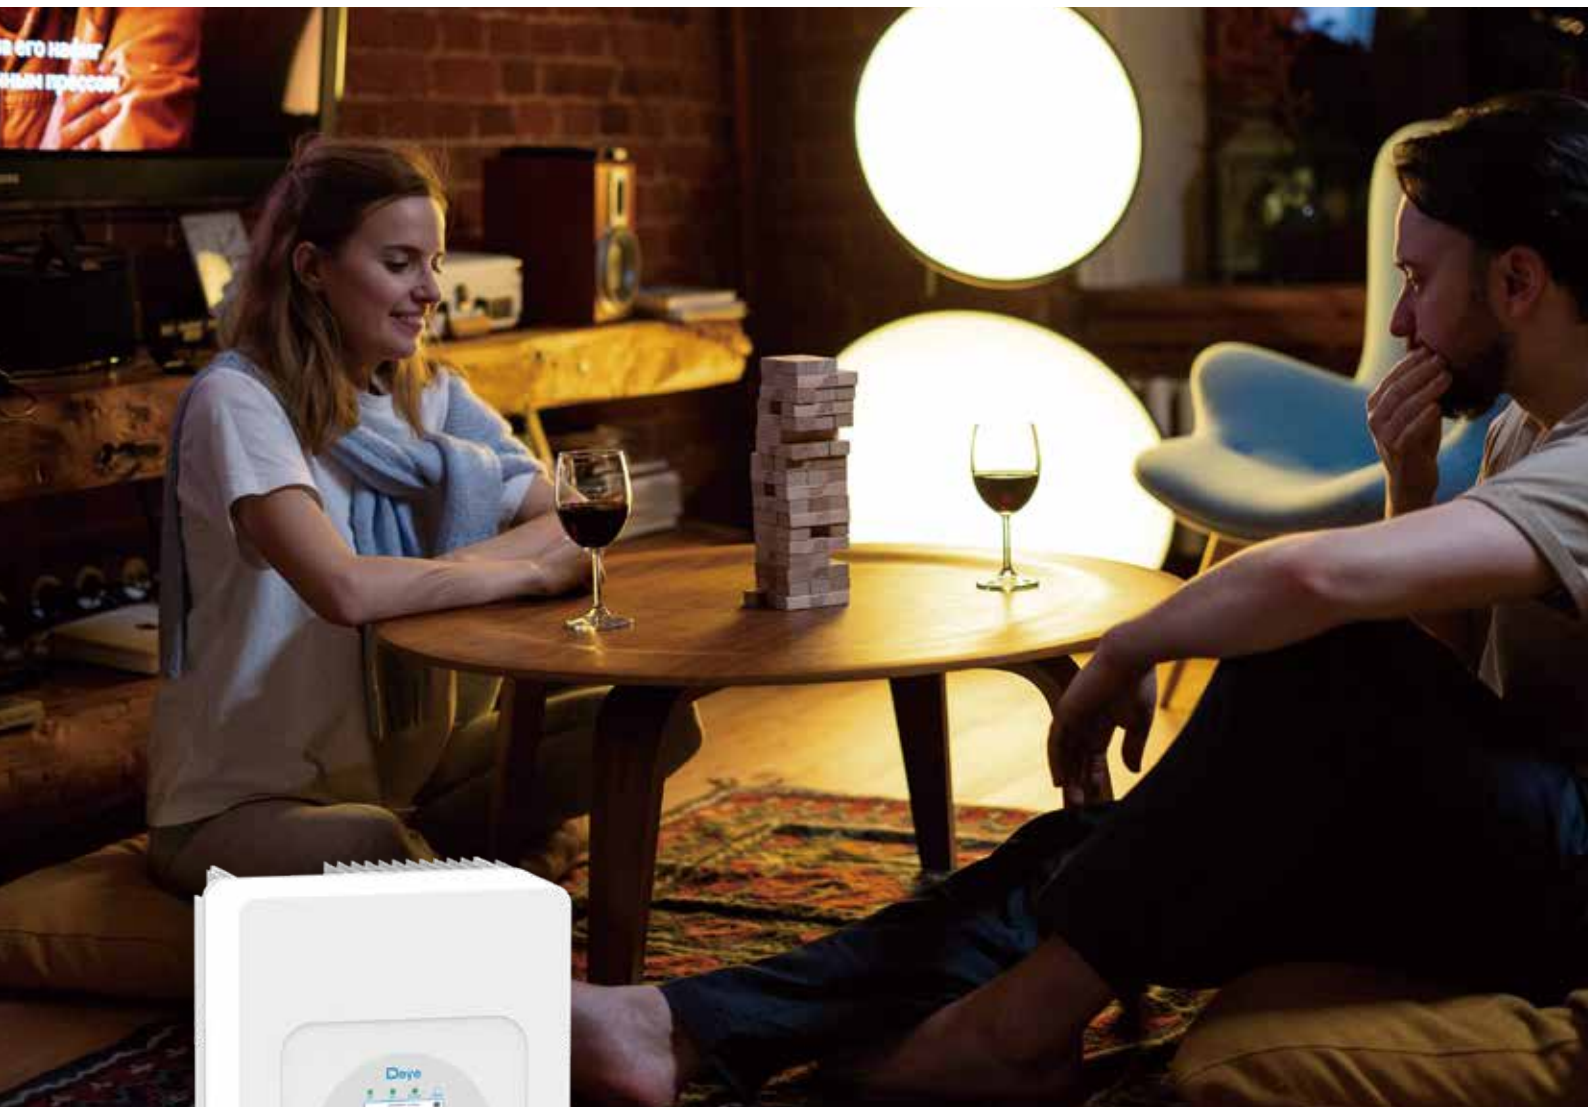

AC couple to retrofit existing solar system

16

Max. 16pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel

135

Max. charging/discharging current of 135A

6

6 time periods for battery charging/discharging



Support storing energy from diesel generator

Deye

Stock Code: 605117.SH

Model	SUN-3K -SG03LP1-AU	SUN-3.6K -SG03LP1-AU	SUN-5K -SG03LP1-AU	SUN-6K -SG03LP1-AU
Battery Input Data				
Battery Type	Lead-acid or Li-Ion			
Battery Voltage Range (V)	40~60	40~60	40~60	40~60
Max. Charging Current (A)	70	90	120	135
Max. Discharging Current (A)	70	90	120	135
Number of battery input	Yes			
Charging Curve	3 Stages / Equalization			
Charging Strategy for Li-Ion Battery	Self-adaption to BMS			
PV String Input Data				
Max. DC Input Power (W)	4500	5400	7500	9000
Rated PV Input Voltage (V)	370 (125-500)			
Start-up Voltage (V)	125			
MPPT Voltage Range (V)	150-425			
Full Load DC Voltage Range (V)	300-425			
PV Input Current (A)	13+13			
Max. PV I _{SC} (A)	19.5+19.5			
Number of MPPT / Strings per MPPT	2/1+1			
AC Output Data				
Rated AC Output and UPS Power (VA)	3000	3600	5000	6000
Max. AC Output Power (W)	3000	3600	5000	6000
AC Output Rated Current (A)	13.1	15.7	21.8	26.1
Max. AC Output Current (A)	13.1	15.7	21.8	26.1
Max. Continuous AC Passthrough (A)	35			40
Peak Power (off grid)	2 time of rated power, 10 S			
Power Factor	0.8 leading to 0.8 lagging			
Rated Input/Output Voltage/Range(V)	220/230 0.85Un-1.1Un			
Rated Input/Output Grid Frequency/Range	50Hz/45Hz-55Hz 60Hz/55Hz-65Hz			
Grid Connection Form	L+N+PE			
Total Harmonics Current Distortion (THDi)	< 3% (of nominal power)			
DC current injection	<0.5% I _n			
Efficiency				
Max. Efficiency	97.60%			
Euro Efficiency	96.50%			
MPPT Efficiency	99.90%			
Protection				
Integrated	Anti-islanding Protection, PV String Input Reverse Polarity Protection, Insulation Resistor Detection, Residual Current Monitoring Unit, Output Over Current Protection, Output Shorted Protection, Surge protection			
Over Voltage Category	DC Type II/AC Type III			
Certifications and Standards				
Grid Regulation	AS/NZS 4777.2			
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2			
General Data				
Operating Temperature Range ()	-40 to +60 , >45 derating			
Cooling	Smart Cooling			
Noise (dB)	<30 dB			
Communication with BMS	RS485; CAN			
Weight (kg)	20.5			
Size (mm)	330W x 580H x232D (Excluding connectors and brackets)			
Protection Degree	IP65			
Installation Style	Wall-mounted			
Warranty	5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy			