


Three Phase String Inverter(LV)

SUN-10/12/15/18/20/21K-G04P3-EU-CM2-LV



127V/220V, 133V/230V and
50/60Hz, Three phase system

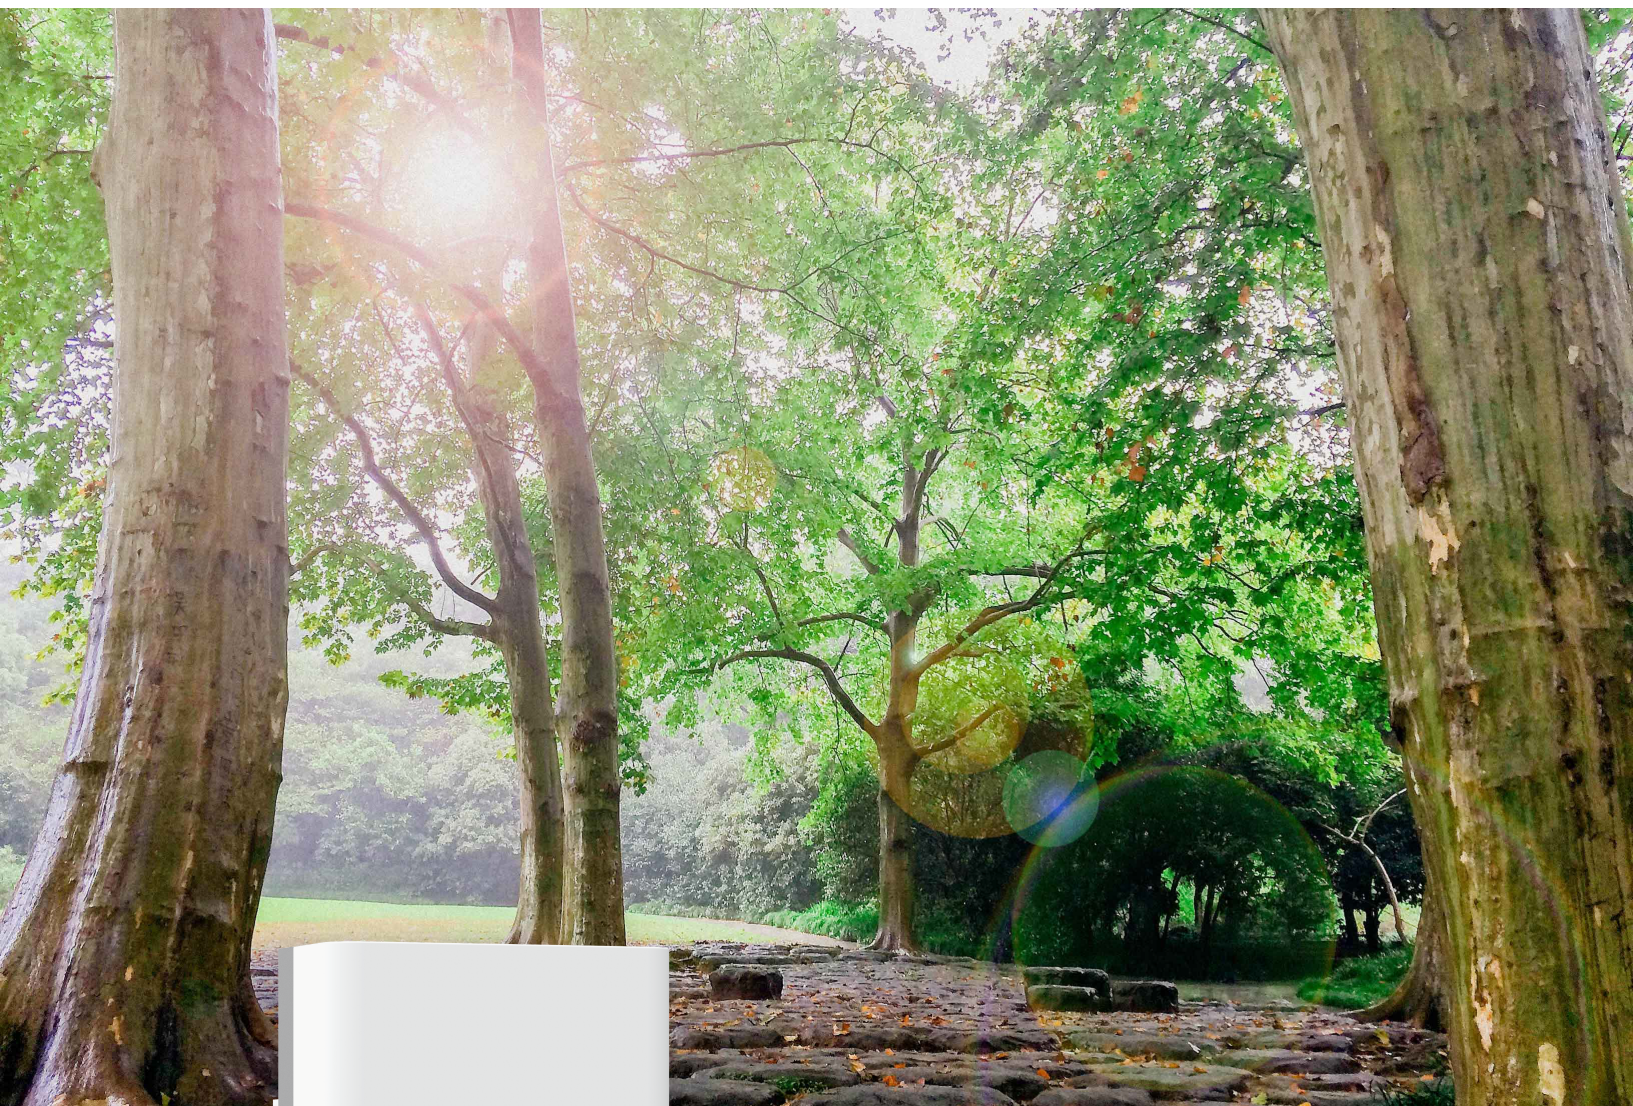

2 MPPT trackers, Max. efficiency up to 98.6%



Zero export application, VSG application



String intelligent monitoring (optional)



Wide output voltage range



Anti-PID function (Optional)

Deye

Stock Code: 605117.SH

Model	SUN-10K-G04P3 -EU-CM2-LV	SUN-12K-G04P3 -EU-CM2-LV	SUN-15K-G04P3 -EU-CM2-LV	SUN-18K-G04P3 -EU-CM2-LV	SUN-20K-G04P3 -EU-CM2-LV	SUN-21K-G04P3 -EU-CM2-LV
PV String Input Data						
Max. PV Input Power (kW)	15	18	22.5	27	30	31.5
Max. PV Input Voltage (V)	800					
Start-up Voltage (V)	250					
MPPT Voltage Range (V)	200-700					
Rated PV Input Voltage (V)	350					
Max. Operating PV Input Current (A)	32+32			40+40		
Max. Input Short Circuit Current (A)	48+48			60+60		
No. of MPP Trackers/ No. of Strings MPP Tracker	2/2+2			2/3+3		
AC Output Side						
Rated AC Output Active Power (kW)	10	12	15	18	20	21
Max. AC Output Apparent Power (kVA)	10	12	15	18	20	21
Rated AC Output Current (A)	26.3/25.1	31.5/30.1	39.4/37.6	47.3/45.2	52.5/50.2	55.2/52.7
Max. AC Output Current (A)	26.3/25.1	31.5/30.1	39.4/37.6	47.3/45.2	52.5/50.2	55.2/52.7
Rated Output Voltage/Range (V)	127V/220V, 133V/230V			0.85Un-1.1Un		
Grid Connection Form	3L/N/PE					
Rated Output Grid Frequency/Range(Hz)	50/45-55, 60/55-65					
Power Factor Adjustment Range	0.8 leading to 0.8 lagging					
Total Current Harmonic Distortion THDi	<3%					
DC Injection Current	<0.5%In					
Efficiency						
Max. Efficiency	98.5%			98.6%		
Euro Efficiency	98.0%			98.1%		
MPPT Efficiency	>99%					
Equipment Protection						
DC Reverse Polarity Protection				Yes		
AC Output Overcurrent Protection				Yes		
AC Output Overvoltage Protection				Yes		
AC Output Short Circuit Protection				Yes		
Thermal Protection				Yes		
Insulation Impedance Detection				Yes		
DC Component Monitoring				Yes		
Arc Fault Circuit Interrupter (AFCI)				Optional		
Anti-islanding Protection				Yes		
Residual Current Detection				Yes		
Surge Protection Level	TYPE II(DC), TYPE II(AC)					
DC Switch	Yes					
Interface						
Communication Interface	RS485/RS232 /WiFi/LAN					
LCD/LED Display	LCD1602					
General Data						
Operating Temperature Range (°C)	-25 to -60°C					
Permissible Ambient Humidity	0-100%					
Permissible Altitude (m)	4000m					
Noise (dB)	≤60					
Ingress Protection(IP) Rating	IP 65					
Inverter Topology	Non-Isolated					
Over Voltage Category	OVC II(DC), OVC III(AC)					
Cabinet Size (WxHxD mm)	330×572×206 (Excluding Connectors and Brackets)					
Weight (kg)	28.7					
Warranty	5 Years					
Type of Cooling	Intelligent Air Cooling					
Grid Regulation	NBR 16149,NBR 16150, EN 50549,RD 140					
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2					