




Micro Hybrid Energy Storage System

MICRO HYBRID ESS

Suitable for on-grid, off-grid, and portable use

SUN-BK80/100/160/200/250-2.56KWH-EU-AM4-18/32L

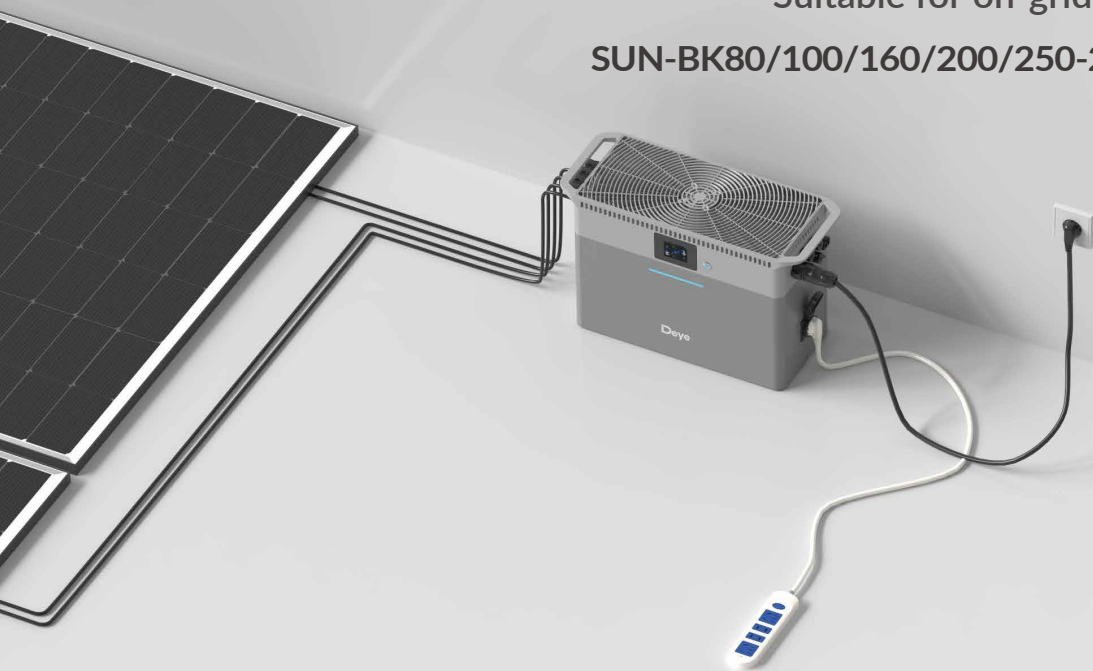

Hybrid Grid-Tied Mode
Self-consumption



Off-Grid Mode
Standalone & portable energy storage



AC-Coupled Mode
Upgrade the existing PV balcony system to ESS



Plug and Play

Installs easily with any standard socket



Wireless Zero-Export Function

Precise control & ultra-low latency



Time-of-Use Electricity Strategy

Sets up 6 time periods for charging/discharging



96.5% Conversion Efficiency

Low energy loss



UPS-Grade Backup Power

≤4ms on-grid/off-grid switchover



Strong Performance

Up to 2.5kW rated AC power



Intelligent Load Control

Supports smart plug, smart switch,
smart EV charger



IP65 Protection Rating

10-year warranty



99% PV Module Compatibility

Max. 5760W PV access power



Portable Design

Reliable power for outdoor trips



Remote O&M

Control via Deye Cloud App



Local Bluetooth Communication

Supports offline control



Micro Hybrid Energy Storage System



Max. 5760W PV
Access Power



2.56kWh
LFP Battery



Max. 2500W On-grid
& Off-grid Operation



Model	SUN-BK80-2.56KWH -EU-AM4-18L	SUN-BK100-2.56KWH -EU-AM4-18L	SUN-BK160-2.56KWH -EU-AM4-18L	SUN-BK200-2.56KWH -EU-AM4-18L	SUN-BK250-2.56KWH -EU-AM4-18L
-------	---------------------------------	----------------------------------	----------------------------------	----------------------------------	----------------------------------

Battery Input Data

Battery Type	LiFePO ₄
Battery Voltage Range(V)	44.8-57.6 V
Battery Nominal Energy (Wh)	2560Wh
Max.Charging/Discharging Current(A)	50A
Charging Strategy for Li-ion Battery	Self-adaption to BMS

PV String Input Data

Max. PV access power (W)	4400W
Max. Operating PV Input Current (A)	18+18+18+18A
Max. Input Short-Circuit Current (A)	27+27+27+27A
Rated PV Input voltage (V)	42.5V
Start-up Voltage (V)	25Vdc
MPPT voltage range (V)	20 ~ 55V
No. of MPP Trackers/No. of Strings MPP Tracker	4/1+1+1+1

AC Input/Output Data

Rated AC Input/Output Active Power (W)	800W	1000W	1600W	2000W	2500W
Max. AC Input/Output Active Power (W)	880W	1100W	1760W	2200W	2750W
Max. off grid power (W)	2500W				
Rated AC Input/Output Current (A)	3.7A / 3.5A	4.6A / 4.4A	7.3A / 7.0A	9.1A / 8.7A	11.4A / 10.9A
Max. AC Input/Output Current (A)	4A / 3.9A	5A / 4.8A	8A / 7.7A	10A / 9.6A	12.5A / 12A
Peak Power (off-grid) (W)	2 times of rated power,10s				
AC Input / Output Frequency and Voltage	50Hz (45Hz ~ 55Hz) , 60Hz (55Hz ~ 65Hz) , L + N + PE , 220 / 230 Vac				
Power Factor Adjustment Range	0.8 leading-0.8lagging				
Max. Continuous AC Passthrough (grid to load)(A)	30A				
DC Injection Current	<0.5%In				

Efficiency

Max. Efficiency	96.5%
Euro Efficiency	96.0%
MPPT Efficiency	>99%

Equipment Protection

Integrated	DC reverse polarity protection, AC Output Overcurrent Protection, AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection, Insulation Impedance detection, Anti-islanding protection
Surge Protection Level	TYPE II(DC),TYPE II(AC)

General Data

Max. Inverter Parallel NO.	3 pcs (up to 7.5 kW rated output)
Communication Interface	Wi-Fi, Bluetooth, LoRa
Operating Temperature Range (°C)	-10°C ~ 55°C, >45°C Derating, (-20°C~55°C with heating, optional)
Permissible Altitude (m)	2000m
Ingress Protection(IP) Rating	IP 65
Cabinet Size (W X H X D)	526 × 326 × 210mm
Weight (kg)	32kg
Permissible Ambient Humidity	0% ~ 95% (No Condensing)
Warranty	10 years
Grid Regulation	VDE 4105, IEC 61727/62116, VDE 0126, AS 4777.2, CEI 0-21, EN 50549-1, G98, C10-11, UNE 217002
Safety EMC/Standard	IEC 62619, UN38.3, IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 61000-6-1/2/3/4

Micro Hybrid Energy Storage System


Max. 5760W PV
Access Power


2.56kWh
LFP Battery


Max. 2500W On-grid
& Off-grid Operation



Model	SUN-BK80-2.56KWH -EU-AM4-32L	SUN-BK100-2.56KWH -EU-AM4-32L	SUN-BK160-2.56KWH -EU-AM4-32L	SUN-BK200-2.56KWH -EU-AM4-32L	SUN-BK250-2.56KWH -EU-AM4-32L
-------	---------------------------------	----------------------------------	----------------------------------	----------------------------------	----------------------------------

Battery Input Data

Battery Type	LiFePO ₄
Battery Voltage Range(V)	44.8-57.6 V
Battery Nominal Energy (Wh)	2560Wh
Max.Charging/Discharging Current(A)	50A
Charging Strategy for Li-ion Battery	Self-adaption to BMS

PV String Input Data

Max. PV access power (W)	5760W
Max. Operating PV Input Current (A)	32+32+32+32A
Max. Input Short-Circuit Current (A)	48+48+48+48A
Rated PV Input voltage (V)	42.5V
Start-up Voltage (V)	25Vdc
MPPT voltage range (V)	20 ~ 55V
No. of MPP Trackers/No. of Strings MPP Tracker	4/1+1+1+1

AC Input/Output Data

Rated AC Input/Output Active Power (W)	800W	1000W	1600W	2000W	2500W
Max. AC Input/Output Active Power (W)	880W	1100W	1760W	2200W	2750W
Max. off grid power (W)	2500W				
Rated AC Input/Output Current (A)	3.7A / 3.5A	4.6A / 4.4A	7.3A / 7.0A	9.1A / 8.7A	11.4A / 10.9A
Max. AC Input/Output Current (A)	4A / 3.9A	5A / 4.8A	8A / 7.7A	10A / 9.6A	12.5A / 12A
Peak Power (off-grid) (W)	2 times of rated power,10s				
AC Input / Output Frequency and Voltage	50Hz (45Hz ~ 55Hz) , 60Hz (55Hz ~ 65Hz) , L + N + PE , 220 / 230 Vac				
Power Factor Adjustment Range	0.8 leading-0.8lagging				
Max. Continuous AC Passthrough (grid to load)(A)	30A				
DC Injection Current	<0.5%In				

Efficiency

Max. Efficiency	96.5%
Euro Efficiency	96.0%
MPPT Efficiency	>99%

Equipment Protection

Integrated	DC reverse polarity protection, AC Output Overcurrent Protection, AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection, Insulation Impedance detection, Anti-islanding protection
Surge Protection Level	TYPE II(DC),TYPE II(AC)

General Data

Max. Inverter Parallel NO.	3 pcs (up to 7.5 kW rated output)
Communication Interface	Wi-Fi, Bluetooth, LoRa
Operating Temperature Range (°C)	-10°C ~ 55°C, >45°C Derating, (-20°C~55°C with heating, optional)
Permissible Altitude (m)	2000m
Ingress Protection(IP) Rating	IP 65
Cabinet Size (W X H X D)	526 × 326 × 210mm
Weight (kg)	32kg
Permissible Ambient Humidity	0% ~ 95% (No Condensing)
Warranty	10 years
Grid Regulation	VDE 4105, IEC 61727/62116, VDE 0126, AS 4777.2, CEI 0-21, EN 50549-1, G98, C10-11, UNE 217002
Safety EMC/Standard	IEC 62619, UN38.3, IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 61000-6-1/2/3/4

Supports up to 5 batteries for vertical stacking expansion and up to 8 clusters (40 batteries) via cable connection



Model	AE-F2.56
Battery Technical Specification	
Battery Chemistry	LiFePO ₄
Battery Nominal Voltage	51.2V
Battery Nominal Energy	2560Wh
Max. Charging / Discharging Current	50A
Battery Operating Voltage	44.8V ~ 57.6V
Battery Cycle Life	≥6,000 (@25°C±2°C, 70%EOL)
Max. Stack NO.	5 pcs (up to 12.8kWh)
Parallel Capability	40 pcs*
Other Technical Specification	
Display	LED (SOC, Alarm)
Communication Interfaces	LoRa
Dimension (W × D × H) (mm)	450 × 210 × 244 (without terminal)
Ingress Protection(IP) Rating	IP 65
Weight Approximate	22±3kg
Operating Temperature Range	-10°C~55°C (-20°C~55°C with heating, optional)
Max. Operating Altitude	2000m
Relative Humidity	0% ~ 95% (No Condensing)
Certification	UN38.3, IEC 62619, CE
Installation Style	Floor-Mounted,Stacked-Mounted
Warranty	10 years

*Maximum 40 Pieces AE-F2.56 Packs in Parallel, Up to 102.4kWh.

Optional Interfaces:

Parallel communication port & load port

RS485 port

CT port

Note: Optional interfaces are not field-upgradable and must be selected at the time of order with the required hardware.



Optional Accessory:

Deye Wireless CT (Model: SUN-SMART-CT02-L)

Installed in the distribution box to monitor power consumption, enabling wireless zero-export control.





SCENARIO-BASED ENERGY MANAGEMENT SOLUTIONS

Utilize energy in every outdoor adventure or household needs. Embrace effortless energy experience that's both eco-friendly and budget-friendly with our intelligent assistant.

Scenario 1 :

Compact Balcony Solar Plant

Automated Energy-Saving Strategies

Scenario 2 :


Camping Power Solution

Empower Your Outdoor Adventure

Scenario 3 :

Reliable Home Emergency Power Source

Ensure You Stay Powered Up When You Need It Most

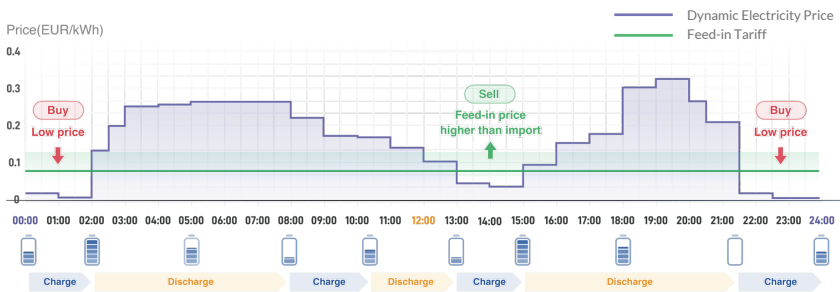

* Selling electricity back to grid is available where local regulations permit.

Download on the
App Store

GET IT ON
Google Play

Join Deye's Intelligent Energy Revolution and Start Saving Today!



What Can It Power

Max. 2.5 kW/ 2.56 kWh

1 Inverter + 1 Battery Design



Typical Device Runtime

No Electricity Anxiety for Emergency Power Backup



Phone

135 Times



Laptop

23 Times



Light

3 Days



TV

7.5 Hours



Camera

133 Times



UAV

20 Times



Microwave

1.8 Hours



Mini Refrigerator

1-2 Days



Wi-Fi Router

3 Days



Space Heater

25 Hours

* The data above is for reference only. Actual runtime may vary with use.

Compatible Appliances



Kitchen Appliances

Electric kettle
1800W

Microwave oven
1000W

Blender
500W

Rice cooker
800W

Air fryer
1500W



Household Appliances

Hair dryer
1800W

Vacuum cleaner
1000W

Air purifier
100W

Space heater
1500W

Washing machine
500W



Office & Entertainment

Wi-Fi router
10W

Laptop
60W

Printer
50W

Projector
300W

Television
120W



Lighting & Small Electronics

Light
10W DC

Phone charger
25W

Fan
40W

Loudspeaker
60W

Tablet
45W

Key Power Note:

The rated powers above are for reference only. All devices with a rated power of $\leq 2500W$ are compatible.

Operational Safety: Ensure the total power of all devices running simultaneously stays under 2500W.