


Micro Hybrid Inverter

SUN-BK60/80/100/SG01-EU-AM2

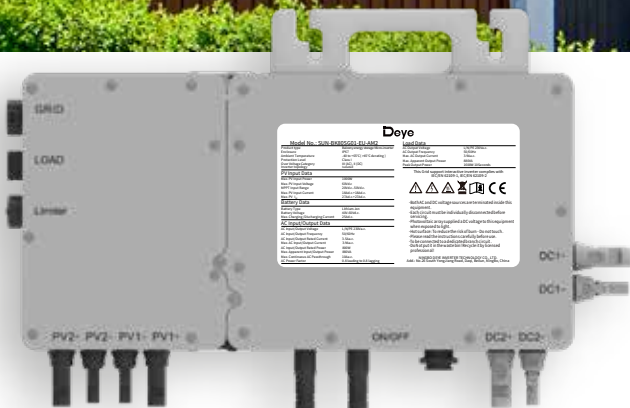

- ✓ IP67 protection degree
- ✓ WIFI communication
- ✓ Wireless CT, Wireless Smart Switch and Wireless BMS communication
- ✓ AC couple to retrofit existing solar system
- ✓ Max. charging/discharging current 25A
- ✓ Expand two independent PV inputs
- ✓ Working in Microinverter mode or storage inverter mode
- ✓ Supports UPS load, fast switching within 4ms

Deye

Stock Code: 605117.SH

Model	SUN-BK60SG01-EU-AM2	SUN-BK80SG01-EU-AM2	SUN-BK100SG01-EU-AM2
Battery Input Data			
Battery Type	Lead-acid or Lithium-ion		
Battery Voltage Range (V)	40-60		
Max. Charging Current (A)	25		
Max. Discharging Current (A)	25		
Charging Strategy for Li-ion Battery	Self-adaption to BMS		
Number of Battery Input	1		
PV String Input Data			
Max. PV Access Power (W)	1320	1760	2200
Max. PV Input Power (W)	960	1280	1600
Max. PV Input Voltage (V)	60		
Start-up Voltage (V)	25		
MPPT Voltage Range (V)	20-55		
Rated PV Input Voltage (V)	42.5		
Max. Operating PV Input Current (A)	18+18		
Max. Input Short-Circuit Current (A)	27+27		
No. of MPP Trackers/ No. of Strings per MPP Tracker	2/1		
AC Input/Output Data			
Rated AC Input/Output Active Power (W)	600	800	1000
Max. AC Input/Output Active Power (W)	660	880	1100
Max. AC Input/Output Apparent Power (VA)	660	880	1100
Rated AC Input/Output Current (A)	2.8/2.7	3.7/3.5	4.6/4.4
Max. AC Input/Output Current (A)	3/2.9	4/3.9	5/4.8
Max. Continuous AC Passthrough (grid to load) (A)	10		
Peak Power (off-grid) (W)	2 times of rated power, 10s		
Power Factor Adjustment Range	0.8 leading to 0.8 lagging		
Rated Input/Output Voltage/Range (V)	220/230 0.85Un-1.1Un		
Rated Input/Output Grid Frequency/Range(Hz)	50/45-55, 60/55-65		
Grid Connection Form	L+N+PE		
Total Current Harmonic Distortion THDi	<3% (of nominal power)		
DC Injection Current	<0.5% In		
Efficiency			
Max. Efficiency	96.5%		
Euro Efficiency	96.0%		
MPPT Efficiency	>99%		
Equipment Protection			
Integrated	DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection Overvoltage Load Drop Protection, Surge protection level		
Surge Protection Level	TYPE II(DC), TYPE II(AC)		
General Data			
Operating Temperature Range ()	-40 to +65°C, >45°C Derating		
Permissible Ambient Humidity	0-100%		
Permissible Altitude	2000m		
Noise (dB)	≤25		
Ingress Protection(IP) Rating	IP 67		
Inverter Topology	Isolated		
Over Voltage Category	OVC II(DC), OVC III(AC)		
Communication	Wi-Fi, Lora, Bluetooth		
Cabinet Size (WxHxD mm)	364.5×183×32.85 (Excluding Connectors and Brackets)		
Weight (kg)	4.3		
Type of Cooling	Natural Cooling		
Warranty	10 Years/15 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy		
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, G98, VDE-AR-N 4105		
Safety / EMC Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2		